



KENYU[®]

marine line

Projectsheet

Private Customer

Name: _____

Road: _____ Number: _____

Country/Code: _____ City: _____

Contact Person: _____

Phone: _____ Email: _____

Boat/Yacht:

Manufact.: _____ Model: _____

Year: _____ Size (ft.): _____ Boat's name: _____

Inboard Engine

Outboard Engine

Boat's Location:

Adress same as customer adress (see above)

Boat will be delivered to KENYU

seperate adress:

Harbour: _____ Berth #: _____

Road: _____ Number: _____

Country/Code: _____ Stadt: _____

Design:

"Teak"-Design (striped)

none (only Frieze)

Custom: _____

Areas to be fitted with KENYU:

Complete

or only single areas, i.e.:

Platform(s)

Stern

Interior

Interior Cabin


Bow

Side Entry Pads

Sides complete

Custom: _____

Area Plan:

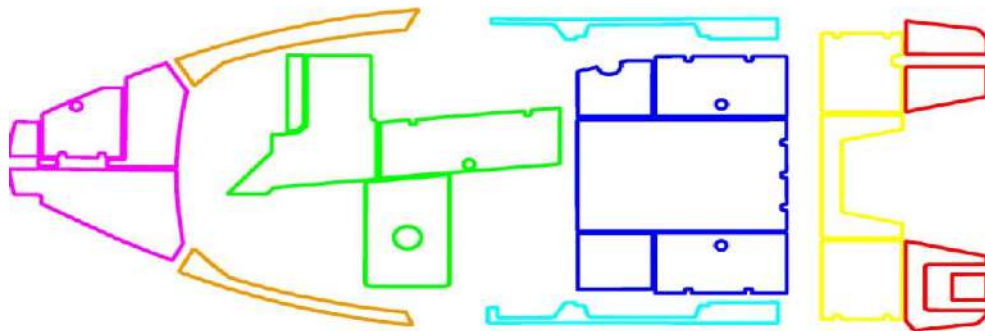

Incorporate Graphics:

No Logo/Lettering

Logo / Lettering (vector file provided by customer) Filename: _____

Logo / Lettering (vectorized by KENYU) Filename: _____

Description, Positioning: _____

Measurement:

- Customer provides digital plan via .dxf- or .dwg-file
- Customer provides template
- Digital scan by KENYU

Mounting: adhesive snap-in

- Floor is installed by the customer
- Floor is installed by KENYU

Color palette of KENYU flooring:



light grey over black



dark grey over black




dark grey single color



anthracite over black



warm grey over black



sand over black



teak over black



cappuccino over black



caramel over teak



sand over teak



black over dark grey



black single color

Special request: _____

ATTENTION: Please note the specific features of our KENYU - flooring as are described on the following pages !

Date: _____ Customer Signature: _____



KENYU®

marine line

Overview of KENYU - flooring material

KENYU - flooring, with its non-skid surface, provides an innovative, safe and comfortable solution to retrofitted marine flooring.

Our KENYU - flooring consists of closed-pored EVA-foam with an approximate 3000 hours UV-resistancy.

Additionally, all KENYU - pads are equipped with a self-adhesive 3M™ glue based on acrylic. This adhesive offers adhesion of the highest grade, even under water.

Characteristics of KENYU flooring material:

- anti-slip surface
- high comfort when sitting, standing and walking on it
- absorbs shock and reduces noise
- self-adhesive, even under water
- UV-resistant
- extremely light-weight
- does not heat up so much, stays cool to the touch
- easy to clean
- wide variety of colors and combinations
- individual customisation and design

KENYU flooring material care and maintenance instructions

- remove excessive dirt immediately
- vacuum or brush off
- rinse off with plenty of clean water

Things that can possibly harm KENYU flooring material

- hard and sharp objects
- excessive, punctual pressure (i.e. high pressure cleaner)
- max. temperatures above 70° centigrade (i.e. bundled light)
- aggressive cleaning